

Home Door/ Window Sensor

The Door Sensor stands out as one of the smallest sensors of its kind on the market. Utilizing Zigbee and a pairing button, the introduction of this device into a smart home is very easy. The small device will make it possible to sense whether a door or window is open or closed and is an essential component in any smart home.


The new standard for door sensors

Fully customizable and upgradeable. OTA (over the air) capabilities in combination with powerful processor ensures future compatability.

Design customization and branding

It has become evident that design and branding heavily affects the market of electronics. We therefore offer customization to suit your brand recognition.

Home. Connected.

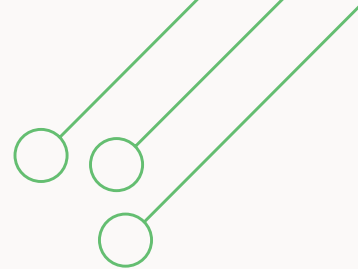

Specifications

Power source

Battery: CR 2450

Local Communication

Radio Protocol: Zigbee 3.0, supports HA 2.1 & ZLL
Frequency: 2400-2483,5 MHz (IEEE 802.15.4)

Environment

IP Class: IP20 (Indoor use)
Operational temperature: 0 to +40 °C
Shipping/storage temperature: -20 to +45 °C
Humidity range: 0 to 90% R.H. (non-condensing)

General

Dimensions: L:40 W:40,4 H:10 (mm)

OTA (Over The Air) upgradeable
For screw mounting or 3M sticker
Low battery warning
LED indicator and pairing button
Supervision enabled
Embedded temperature sensor
Tamper

Compliance: CE